

FLEKKOTE

*Manufactured by : Les Industries MarTex inc.
1345 Tees St-Laurent, Qc, (514) 335-0990*

Product Description :

Polymer base system for **indoor surfaces**




Applications :

Garage floors, solariums, showrooms, playrooms, locker rooms, lobbies, hallways, steps and many more

Characteristics:

- Easy application system
- Virtually odorless
- Seamless finish
- Decorative and easy maintenance
- 6 standard colors (special colors upon request for small fee)
- Higher sheen
- Free seminars available upon request

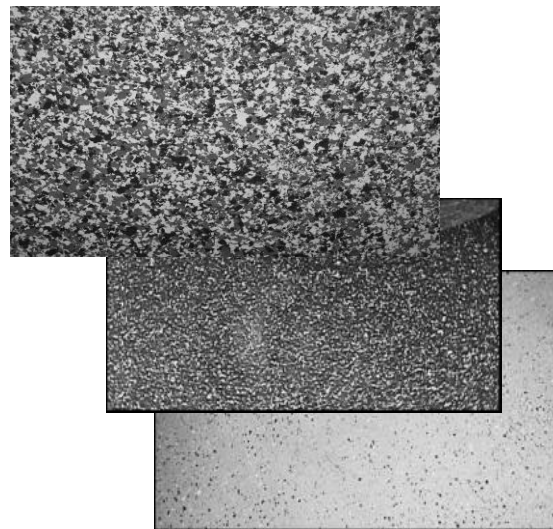

FLEKKOTE

COVERAGE

***FLEX 10:**

COVERS APPROX 60-70 SQ FT

PRODUCTS NEEDED WITH THIS KIT :

3.78L FLEXBOND (PRIMER GLUE)

3.78L JK3030 (SEALER) or WB EPOXY

***FLEX 25:**

COVERS APPROX 150 à 175 SQ FT.

PRODUCTS NEEDED WITH THIS KIT :

2 X 3.78L FLEXBOND (PRIMER GLUE)

2 X 3.78L JK3030 (SEALER) or WB EPOXY kit

***FLEX 50:**

COVERS APPROX 300 à 325 SQ FT

PRODUCTS NEEDED WITH THIS KIT :

12L FLEXBOND (PRIMER GLUE)

12L JK3030 (SEALER) or WB EPOXY KIT

Quantities and coverage are approximate and could vary according to substrate porosity, type of substrate and experience of the end use. Product estimates available upon request

FLEXKOTE

STEP BY STEP

**It is very important to prepare the surface with the proper products prior to applying FlexKote. Surface must be thoroughly cleaned (pressure washed if possible) and free of all dust, glue, paint residues, grease or any other contaminants that could inhibit proper adhesion. Repair any voids with polymer cement.

❶ With a 10mm, lint free roller, apply a coat of Flexbond over entire area
Let dry until surface is no longer sticky (1 to 4 hours in well ventilated area)

❷ Roll a generous amount of Flexbond in small manageable sections and immediately broadcast (with hands) the FlexKote particles over the Flexbonded area. Continue this in small sections until the entire area is covered with FlexKote particles. Let dry 8 hours

❸ With a broom, sweep off all excess FlexKote particles that have not bonded to the surface. Save all excess FlexKote particles for your second application.
(Note : A leaf blower can replace the broom. Simply blow all the excess into one corner and pick up with a dust pan. Do not use any machines to suction the FlexKote (e.g Shop vacs, vacuums etc.) as this will break down the particles.

❹ Repeat step 2 and 3 to achieve a true full coverage look

❺ Seal Surface : The sealer is what give you the durability. It is important to choose the sealer that is conducive to your day to day use of the area.

*Regular use (no vehicles on surface)

With a 10 mm, lint free roller, apply 2 to 3 coats of JK3030 sealer over the well swept area.(allow 2 hours between each coat of sealer).

*Industrial use:

For a tougher film, we recommend using our WB epoxy coating (2 coats **allowing 24 hours between each coat). Our epoxy is a 2 component A and B mixture. Mix one part A to one part B, mixing regularly, and simply roll on a generous coat working the product into the surface (short haired lint free roller is recommended). Application should be “back and forth” and then “side to side” insure the product is applied evenly. Only mix the quantity needed, once the A and B are mixed the product must be applied within a few hours or the product will harden and be deemed soiled. Apply 2nd coat in the same manner. Note that your 2nd coat will use much less product than the first. The epoxy is white when wet and dries clear.

To achieve a very smooth finish, the surface may be sanded after the 1st coat of sealer has dried. Once the entire area has been lightly sanded, clean the sanding dust with a mop or wet cloth and then apply 1 or 2 more coats of the sealer. It is important to reseal your surface every 2-5 years depending on the use of the area. Product cures in 21 days, please allow full curing prior to dragging heavy object on surface or parking a car.

MarTex Industries Inc. shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these products not in accordance with current printed instructions and spec sheets or for other than the intended use. MarTex Industries Inc. shall not be liable for any installations done by independent contractors or installers as conditions of installation as well as stipulations made by others are out of our control. Before using, user shall determine the suitability of the product for its intended use and user alone assumes all risks and liability whatsoever in connection therewith. MarTex Industries Inc' liability is expressly limited to replacement, in containers, of proven defective products (proof of purchase required). Any claim shall be deemed waived unless made in writing to MarTex Industries Inc. within thirty (30) days from date it was, or reasonably should have been discovered.